

Pendant Mount Installation Instructions

■ For your safety, read and understand instructions completely before starting

Note: PreciseLED recessed fixtures are designed to meet the latest NEC requirements and are listed in full compliance with UL 1598. Before attempting installation of any recessed lighting fixture, check your local electrical building code. This code sets the wiring standards and installation requirements for your locality and should be understood before starting work. If fixture is to be switch from wall switch or dimmer, make sure black supply wire properly connected to switch or dimmer (follow switch/dimmer instructions).


■ WARNING:




1. Before wiring to power supply, turn off electricity at the fuse or circuit break box.
2. Always have installation performed by a licensed electrician.

■ FIXTURE INSTALLATION


Scenario 1: Connecting and Wiring Powered Pendant to the end of One Segment

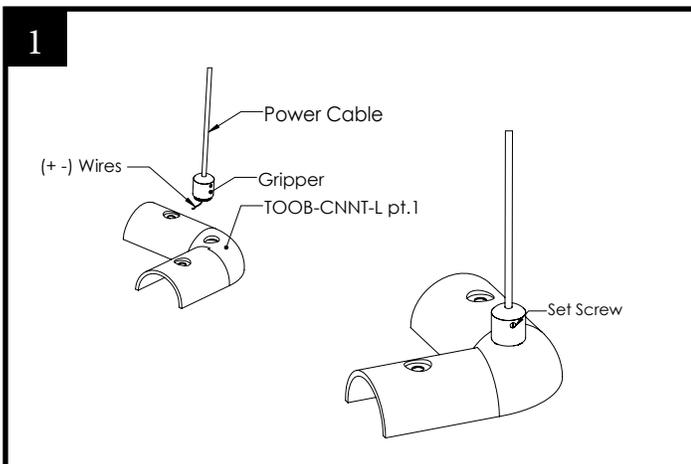


1. Connect the Gripper to Part 1 of the L Connector. (Note: Loosen the set screw to adjust wire length as needed)

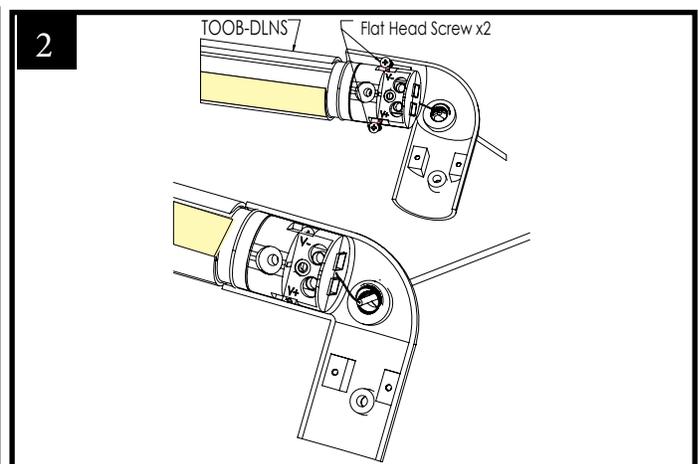

2. Screw the TOOB segment into the inner side of the L connector using the provided flat head screws. Tighten the screws until they are flush against the connector.

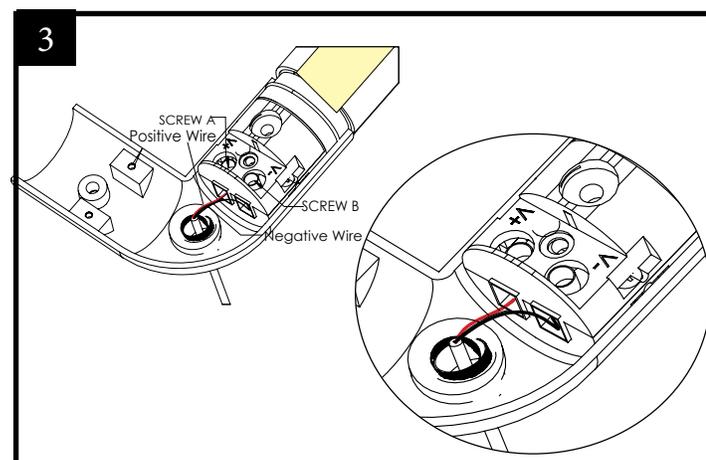


3. Loosen screws A and B, then insert the wires according to the wiring diagram above. Tighten the screws to secure the wires in place.

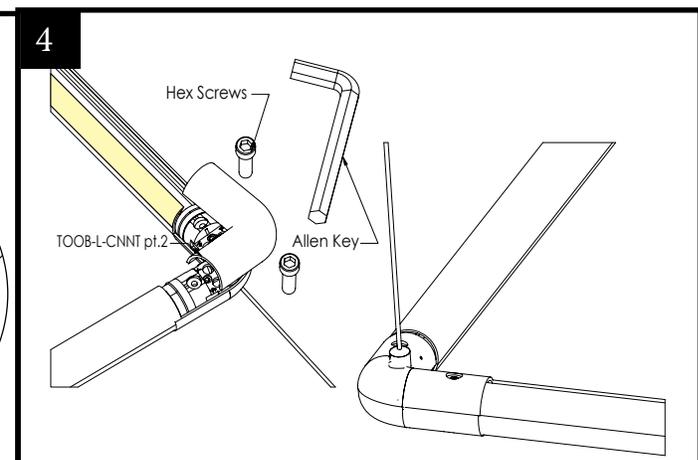

4. Use the allen key to screw the hex screws connecting L connector Part 1 to L connector Part 2.


Pendant Mount Installation Instructions

■ Scenario 2: Wiring one TOOB segment to another

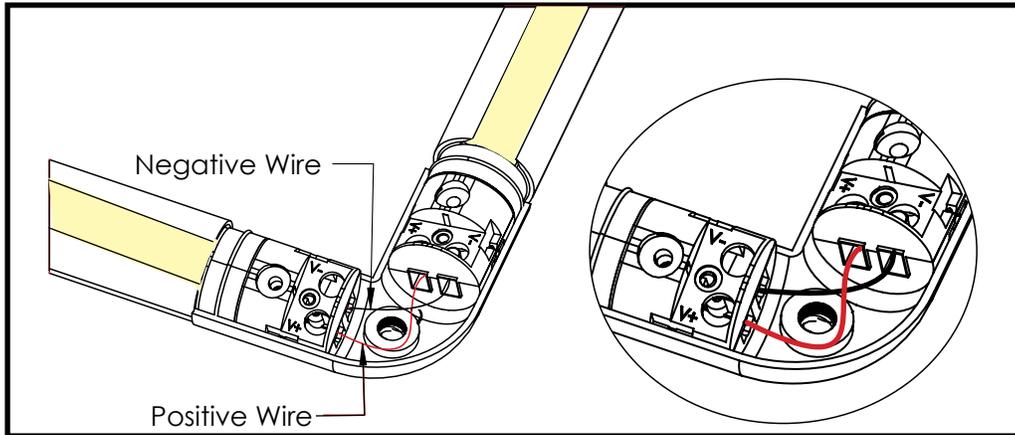

Loosen screws A and B on both TOOB segments and insert the provided wires according to the above wiring diagram. Tighten the screws to secure the wires in place.


■ Scenario 3: Wiring the Powered Pendant to one TOOB segment and jumping the power to another

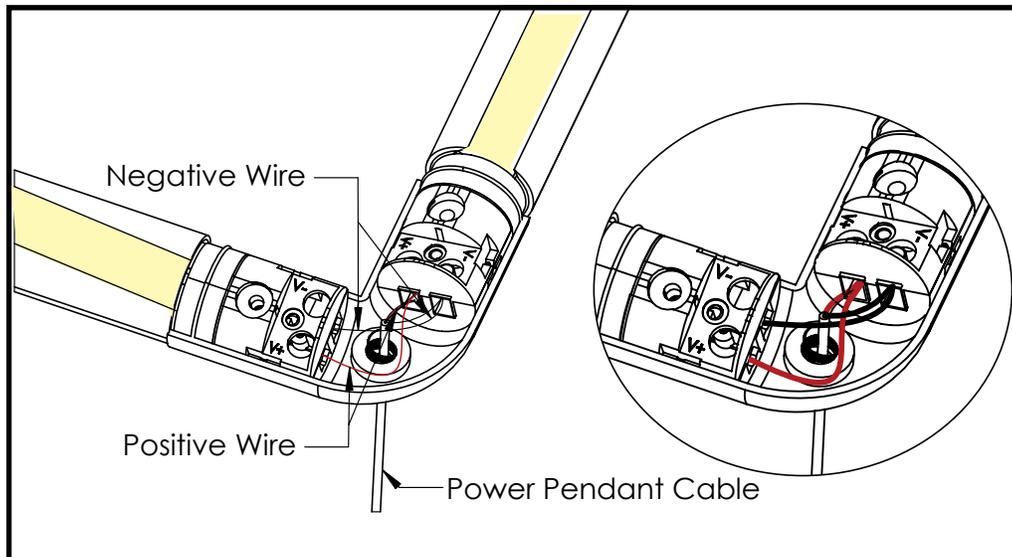

Loosen screws A and B on both TOOB segments and insert the wires from the cable according to the wiring diagram. Then insert the provided positive and negative wires as shown above to jump power through to the next segment. Tighten the screws to secure the wires in place.

■ WIRING DIAGRAM

Wiring diagram for a typical installation of the light fixture with a compatible driver and switch.

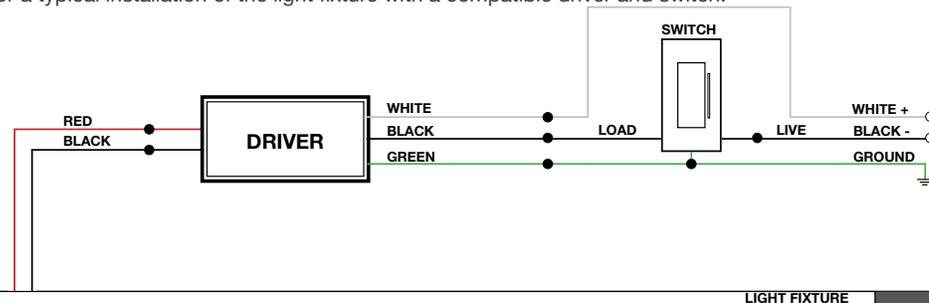

Pendant Mount Installation Instructions

Powered Pendant Installation With Canopy


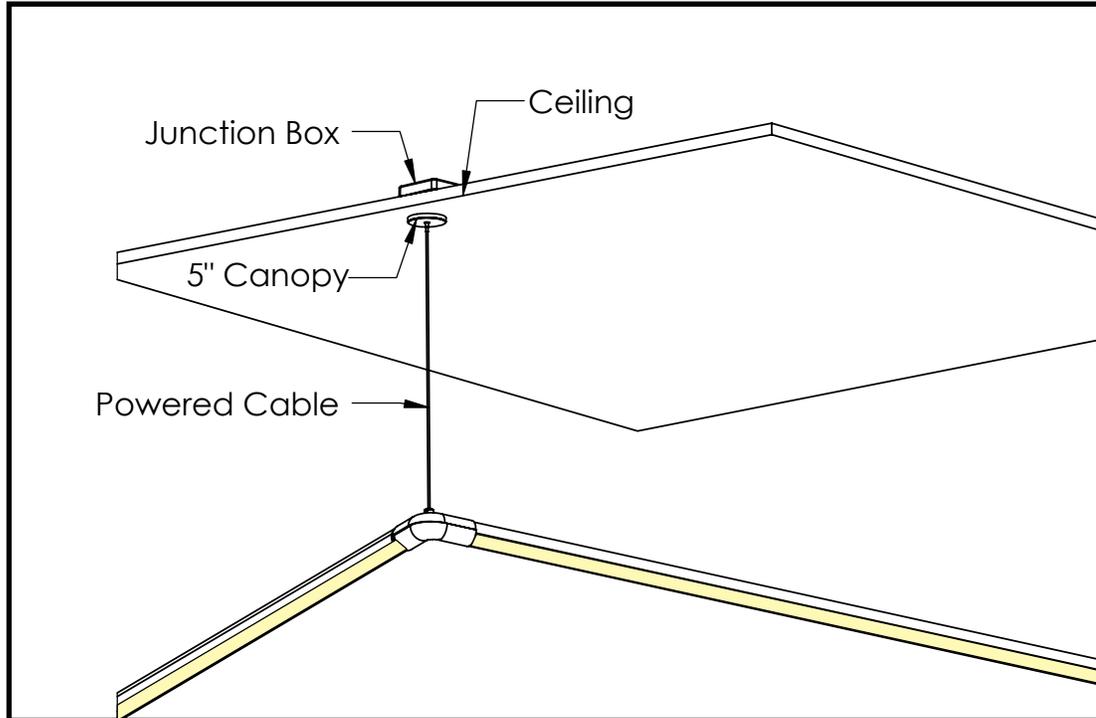


Illustration of powered pendant installation using standard 2" canopy.

Aircraft Cable Installation with Standoff (Non-Powered)

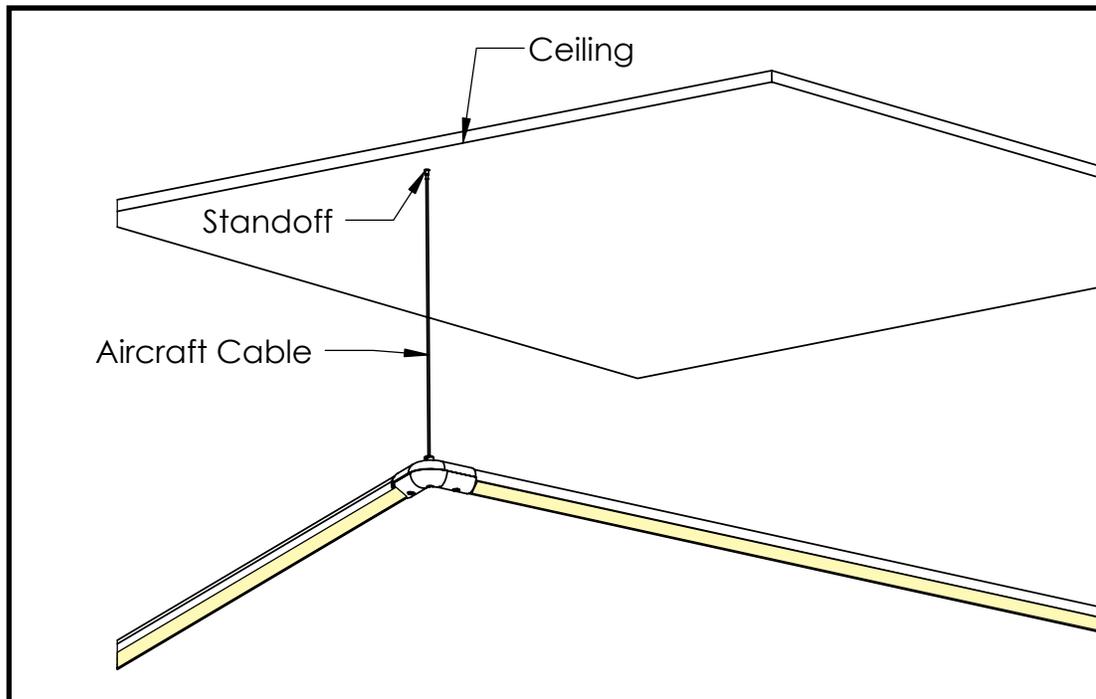

Alternative installation using aircraft cable and standoff bracket.