

Arc Beam Low


LED TAPE LIGHT

Project Name:

Fixture Type:

DESCRIPTION




All PreciseLED tape light products feature a flexible copper core and are cut and soldered to specified length in our factory. PreciseLED tape lights additionally have best-in-class color rendering, color consistency, and, when combined with our dimming drivers, dimming and flickering performance. Our ACBL is the first tape light designed to smoothly bend on the horizontal axis. It sets the standard for performance and superior quality.

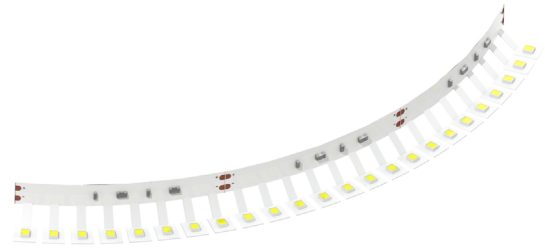

SPECIFICATIONS

- Voltage: 24V
- Watts per foot: 2 W/ft
- Estimated Value Lumens per foot: 209.1 Lm/ft
- 2835 LED's
- 34 diodes/foot
- Dimmable using dimmable driver
- Backed with 3M Adhesive
- Ambient Temperature: -4°F ~ +113°F
- Humidity: 40% ~ 70% R
- IP Protection: IP20
- Tail end field cuttable every 2.83 Inches
- 50,000 Hours Lamp Life
- Max Run: 38.4 Feet
- 3 Step Binning
- CRI ≥ 95 , R_r ≥ 95 , R_g ≥ 100
- 5 Year Warranty
- Patent Pending

DIMENSIONS

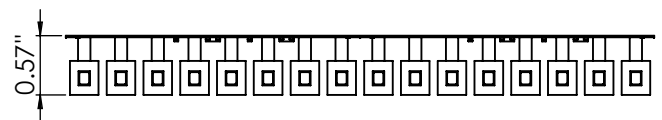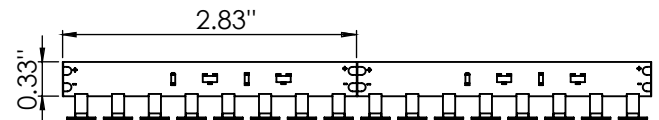


Please see PreciseLED.com for warranty and installation information.

ORDERING CODE

Example: **ACBL-16'-24V-95C-30K**

Product	Spool Length	Volts	CRI	Color Temperature	Ambience	Binning
ACBL		24V	95C		STANDARD	3 STEP
ACBL	'ft "in Custom Length	24V-24V	95C ≥ 95 CRI	27K 2700K 30K 3000K 35K 3500K 40K 4000K	STANDARD	3 STEP (standard)

COMPATIBLE TAPE LIGHT DRIVERS

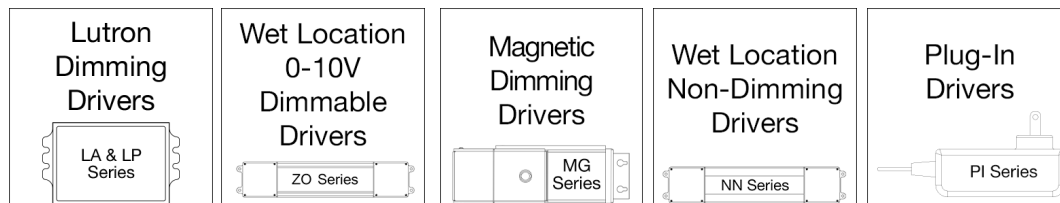



Click [here](#) for a more detailed Driver Overview.

Arc Beam Low

LED TAPE LIGHT

Project Name:

Fixture Type:

Optional Wiring Configurations	Description	Ordering Code
	Custom Tail Wire Length	TAIW
	Custom Lead Wire Length	LEAW
	Tail Jumper Cable	JUMP
	2.1MM DC CONNECTOR (FEMALE)	PLGF
	2.1MM DC CONNECTOR (MALE)	PLGM

*Default wire length is 12", no number in front of ordering code indicates default length

Note: Solder points are secured with cable grips.

ORDERING ACBL

Example: **ACBL-16'-24V-95C-30K-14TAIW**

COMPATIBLE TAPE LIGHT CHANNELS



ZNLT-ARC1

Dimensions: 1.35"W x 0.84"H




ZNLT-ARC1- PM

Dimensions: 0.89"W x 1.00"H



ZNLT-ARC1- SM

Dimensions: 0.89"W x 1.00"H



ZNLT-FLEX

Dimensions: 0.93"W x 0.94"H

Click [here](#) to view our Tape Light Channels


Arc Beam Low

LED TAPE LIGHT

Project Name:

Fixture Type:

TYPICAL INSTALLATION

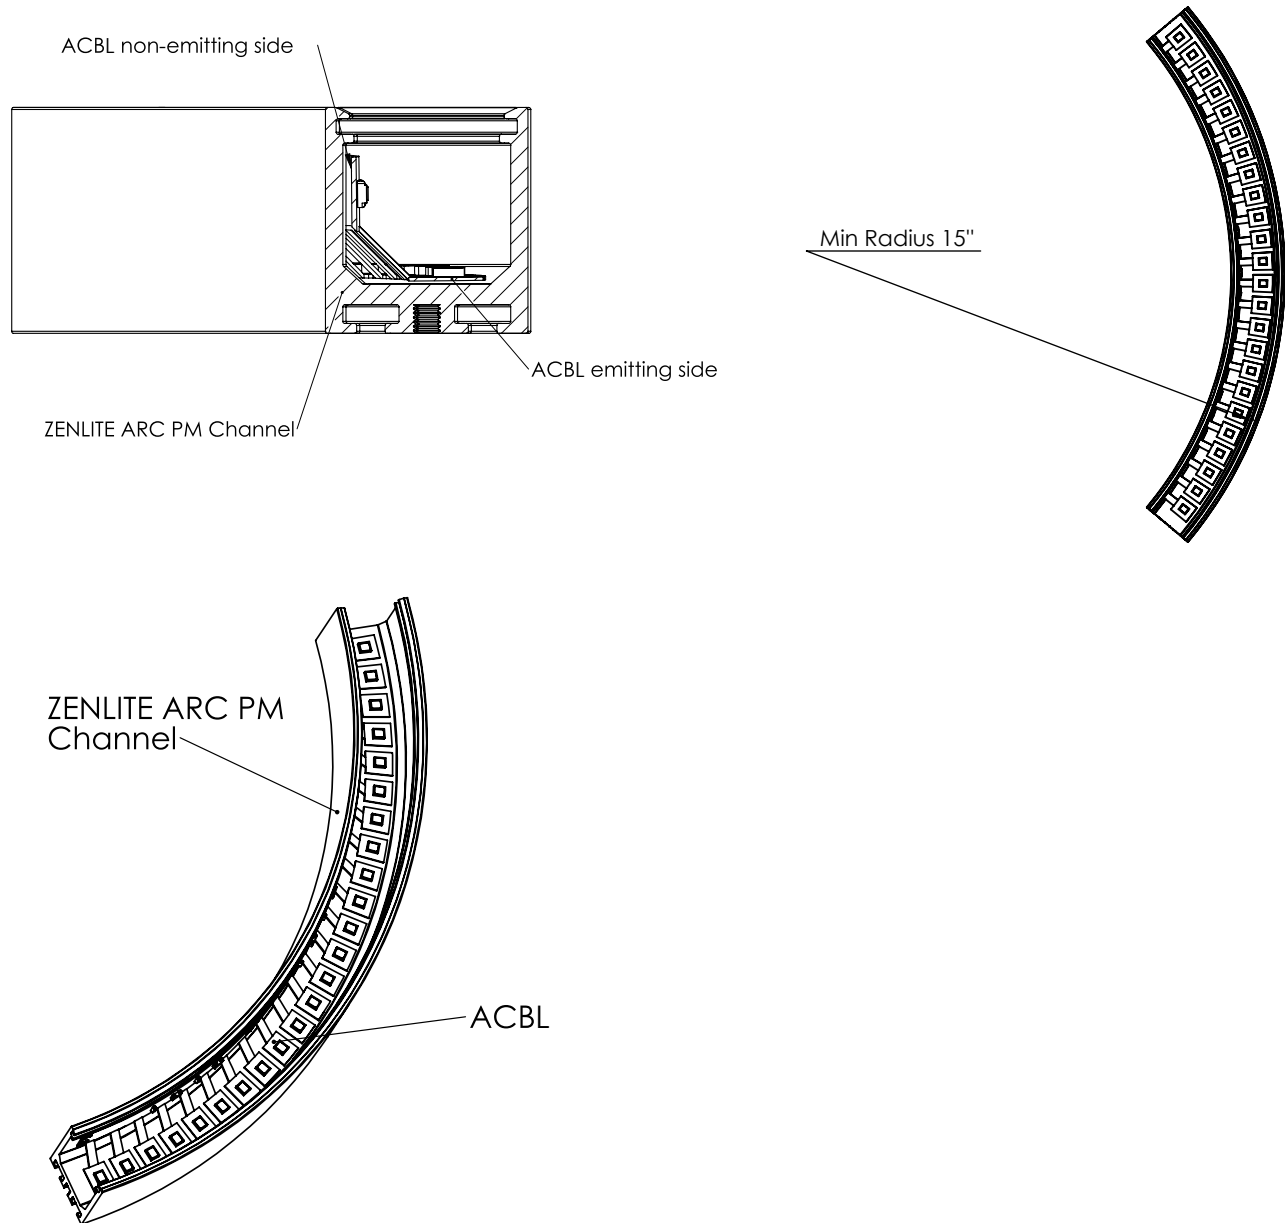

Arc Beam Low

LED TAPE LIGHT


preciseLED
Precision Through Innovation

Project Name:

Fixture Type:

■ LEVEL OF SPOTLESSNESS PER CHANNEL/ LENS COMBINATION



	Opal Lens	Diffuse Lens	Clear Lens
FIGURE	SL	SL	CL
FIGURE FLAT	SS	SS	CL
CONNECTWIDE	SL	SS	CL
45 DEGREE	SL	SS	CL
FIGURE TALL	SL	SL	CL

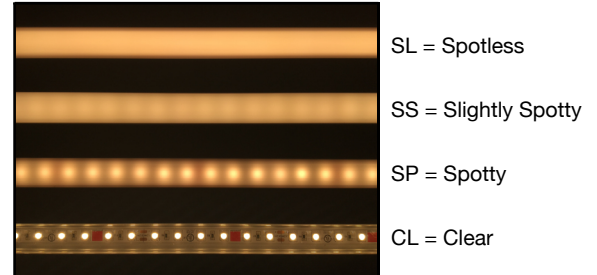

■ TOTAL LUMEN OUTPUT PER CHANNEL/ LENS COMBINATION

	Opal Lens	Diffuse Lens	Clear Lens
FIGURE	30%	51%	70%
FIGURE SLIM	39%	63%	86%
FIGURE FLAT	41%	63%	85%
CONNECTWIDE	26%	53%	67%
45 DEGREE	25%	49%	62%

■ LIGHT DISTRIBUTION CURVE

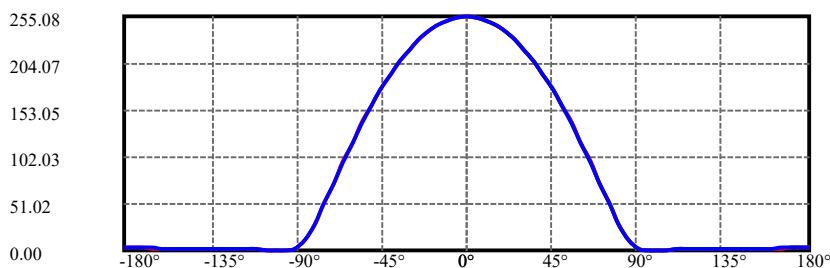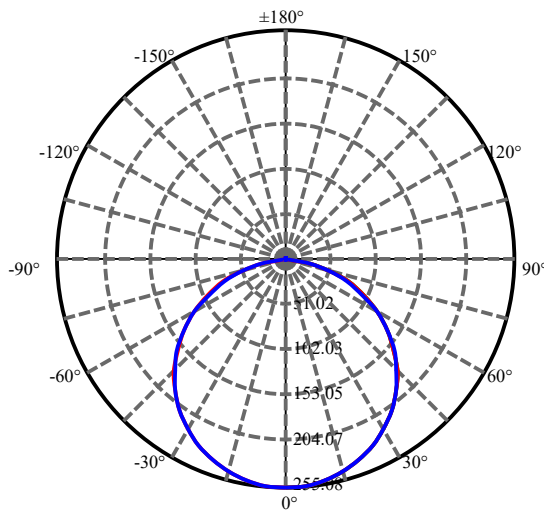

C0(Max):

C0/C180:

C90/C270:

Field angle(10%Imax):C0/180Left:80.7 Right:80.7

:C90/270Left:80.8 Right:80.8

Beam Angle(50%Imax):C0/180Left:57.7 Right:57.7

:C90/270Left:57.6 Right:57.6

File Name: ACBL Spec Sheet A04 NOV 22, 2022

© 2020 PreciseLED Inc.

Wereservetherighttochangespecificationswithoutpriornotice.

52 Railroad Ave
Valley Stream, NY 11580

www.preciseled.com
info@preciseled.com



Arc Beam Low

LED TAPE LIGHT


Project Name:

Fixture Type:

TM-30 DATA

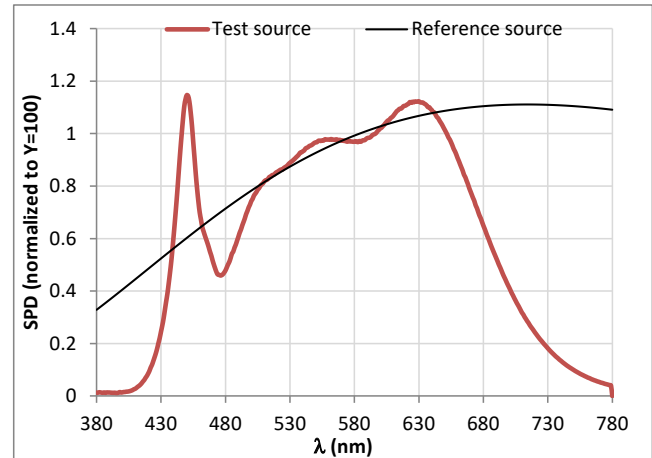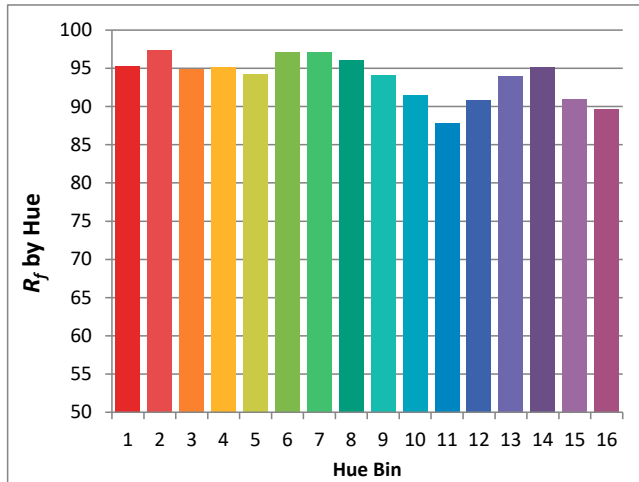

Hue Bin	R_f	Graphic shifts (%)	
		Chroma	Hue
1	95	-2%	-1%
2	97	-1%	0%
3	95	-1%	2%
4	95	-1%	1%
5	94	-2%	1%
6	97	1%	1%
7	97	-1%	0%
8	96	-1%	1%
9	94	-1%	4%
10	91	-1%	5%
11	88	2%	7%
12	91	3%	3%
13	94	4%	-1%
14	95	3%	-1%
15	91	2%	-5%
16	90	2%	-6%

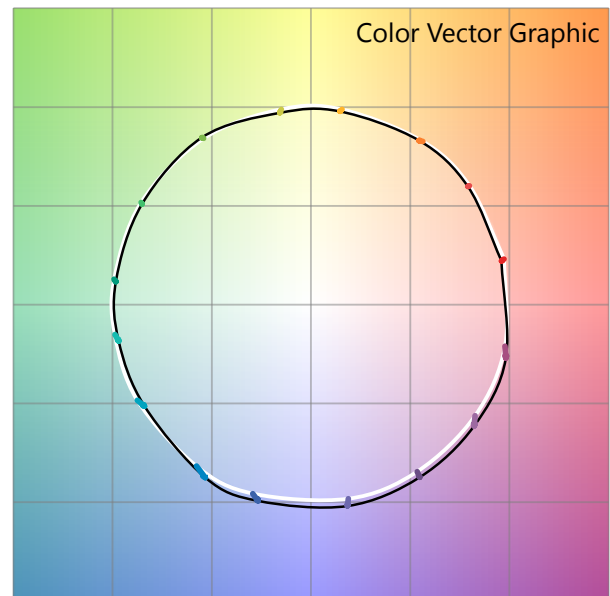

Arc Beam Low

LED TAPE LIGHT

Project Name:

Fixture Type:

Please refer to chart below for exact lengths of the Hi Beam Tape Light

Ordered Length		Actual Length
(Foot-Inches)	(Inches)	(Inches)
0'-3"	3	3.9
0'-7"	7	7.8
0'-11"	11	11.7
1'-3"	15	15.6
1'-7"	19	19.5
1'-11"	23	23.4
2'-3"	27	27.3
2'-7"	31	31.2
2'-11"	35	35.1
3'-3"	39	39
3'-6"	42	42.9
3'-10"	46	46.8
4'-2"	50	50.7
4'-6"	54	54.6
4'-10"	58	58.5
5'-2"	62	62.4
5'-6"	66	66.3
5'-10"	70	70.2
6'-2"	74	74.1
6'-6"	78	78
6'-9"	81	81.9
7'-1"	85	85.8
7'-5"	89	89.7
7'-9"	93	93.6
8'-1"	97	97.5
8'-5"	101	101.4
8'-9"	105	105.3
9'-1"	109	109.2

Ordered Length		Actual Length
(Foot-Inches)	(Inches)	(Inches)
9'-5"	113	113.1
9'-9"	117	117
10'-0"	120	120.9
10'-4"	124	124.8
10'-8"	128	128.7
11'-0"	132	132.6
11'-4"	136	136.5
11'-8"	140	140.4
12'-0"	144	144.3
12'-4"	148	148.2
12'-8"	152	152.1
13'-0"	156	156
13'-3"	159	159.9
13'-7"	163	163.8
13'-11"	167	167.7
14'-3"	171	171.6
14'-7"	175	175.5
14'-11"	179	179.4
15'-3"	183	183.3
15'-7"	187	187.2
15'-11"	191	191.1
16'-3"	195	195
16'-6"	198	198.9
16'-10"	202	202.8
17'-2"	206	206.7
17'-6"	210	210.6