

Dim To Warm

LED TAPE LIGHT

Project Name:

Fixture Type:

DESCRIPTION


Our DTWM Tape Light allows for varying the color temperature depending on the desired ambiance in the room. As the light is dimmed, the color temperature decreases as well.

SPECIFICATIONS

- Voltage: 24V
- Watts per foot: 6 W/ft
- Lumens per foot: 308 Lm/ft
- 2832 and 1520 LED's
- 39 diodes/foot
- Dimmable using dimmable driver
- Color Temperature range: 1800K-3000K
- Backed with 3M Adhesive
- Ambient Temperature: -4°F ~ +113°C
- Humidity: 40% ~ 70% R
- IP Protection: IP20 or IP67 with IP67 channel
- Tail end field cuttable every 2.81 Inches
- 50,000 Hours Lamp Life
- Max Run: 12.8 Feet
- 3 Step Binning Process
- CRI ≥ 95 , $R_i \geq 95$, $R_g \geq 100$
- ETL Listed for US and Canada
- 5 Year Warranty



DIMENSIONS

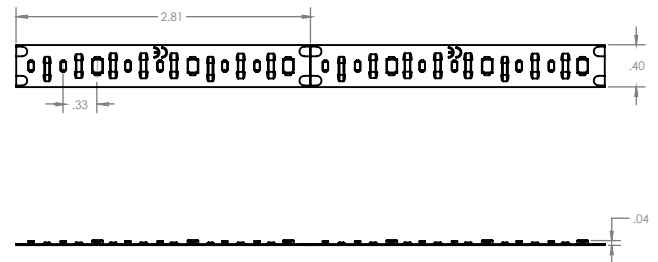


Please see PreciseLED.com for warranty and installation information.

ORDERING CODE


Example: DTWM-16'-24V-95C-2030K

Product	Spool Length	Volts	CRI	Color Temperature
DTWM	'ft "in Custom Length	24V 24 Volts	95 95CRI	18-30K 1800K-3000K ¹


COMPATIBLE TAPE LIGHT CHANNELS




FGTL -
Figure Tall
(Opal Lens
Recommended)




FGRE - Figure
(Opal Lens
Recommended)




FGFL -
Figure Flat



45DE -
45 Degree



CNWD -
Connectwide



45WD -
45 Degree Wide

1. Please note: color temperatures achieved through color mixing can appear different to the naked eye than what is measured in a lab. Our DTWM module tests at 3000K using the recommended Figure or Figure Tall channel with Opal Lens. Using Diffused lens will increase spottiness at lower level and increase color temperature slightly at higher level, by around 200K.






Click [here](#) to view our Tape Light Channels

Dim To Warm

LED TAPE LIGHT

Project Name:

Fixture Type:

Optional Wiring Configurations	Description	Ordering Code
	Custom Tail Wire Length	TAIW
	Custom Lead Wire Length	LEAW
	Tail Jumper Cable	JUMP
	2.1MM DC CONNECTOR (FEMALE)	PLGF
	2.1MM DC CONNECTOR (MALE)	PLGM


ORDERING CODE

Example: DTWM-16'-24V-95C-20-30K-

*Default wire length is 12", no number in front of ordering code indicates default length


COMPATIBLE TAPE LIGHT DRIVERS

Magnetic Dimming Drivers



MG Series

Wet Location 0-10V Dimmable Drivers



ZO Series

Click [here](#) for a more detailed Driver Overview.