

Grid Beam

LED TAPE LIGHT

Project Name:

Fixture Type:

DESCRIPTION


All PreciseLED tape light products feature a flexible copper core and are cut and soldered to specified length in our factory. PreciseLED tape lights additionally have best-in-class color rendering, color consistency, and, when combined with our dimming drivers, dimming and flickering performance. Our Grid Beam tape light consists of tightly spaced LEDs that create a seamless light. Its ultra-low profile enables installation practically anywhere. It comes with a 3M adhesive back which makes the installation easy, clean, and safe!



SPECIFICATIONS

- Voltage: 24V
- Watts per foot: 7 W/ft
- Average Lumens per foot: 700.8 lm/ft
- Dimmable using dimmable driver
- Backed with 3M Adhesive
- Ambient Temperature: -4°F ~ +113°F
- Tail end field cuttable every 1.20" inches
- 50,000 Hours Lamp Life
- 3 Step Binning Process
- Protection: IP20
- CRI ≥ 90
- 5 Year Warranty

DIMENSIONS

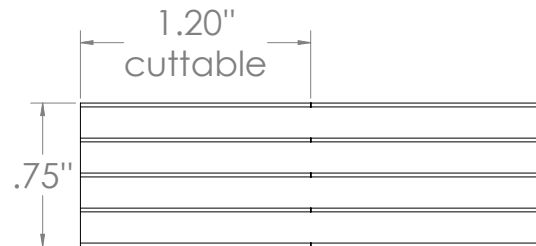


Please see PreciseLED.com for warranty and installation information.

ORDERING CODE

Example: **GDBM-16'-24V-95C-30K**

Product	Spool Length		Volts	CRI	Color Temperature
GDBM	'ft	"in	24V- 24 Volts	90C ≥ 90CRI	27K 2700K 30K 3000K 35K 3500K 40K 4000K
	Custom Length				

COMPATIBLE TAPE LIGHT DRIVERS

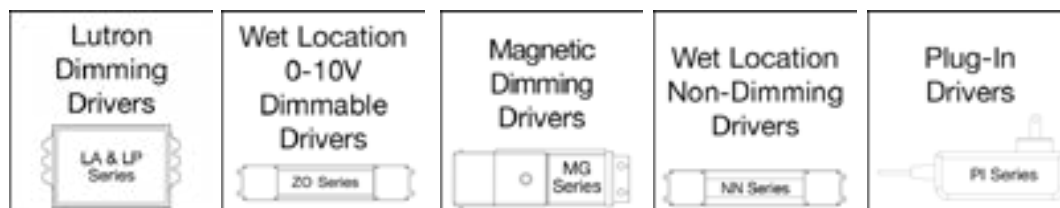

Click [here](#) for a more detailed Driver Overview.

Grid Beam

LED TAPE LIGHT

Project Name:

Fixture Type:

■ WIRING CONFIGURATIONS

These are the available wiring configurations for the tape light. Solder points are secured with heat shrink tube.

Custom Tail Wire Length

Part #: GDBM-xxTAIW

Custom Lead Wire Length

Part #: GDBM-xxLEAW

Tail Jumper Cable

Part #: GDBM-xxJUMP


Rear Feed

Part #: GDBM-xxREAR

xx - xx inches

Default wire length is 12"

■ COMPATIBLE TAPE LIGHT CHANNELS

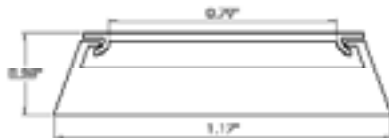

ZNLT-GRID

Dimensions: 1.17"W x 0.28"H