

Louvre Cool Beam

LED TAPE LIGHT

Project Name:


Fixture Type:

DESCRIPTION


All PreciseLED tape light products feature a flexible copper core and are cut and soldered to specified length in our factory. PreciseLED tape lights additionally have best-in-class color rendering, color consistency, and, when combined with our dimming drivers, dimming and flickering performance. Our Louvre Cool Beam tape light has LEDs spaced at specific intervals, that are compatible with our trims that allow for multiple beam spreads, and to achieve a unique look. It comes with a 3M adhesive back which makes the installation easy, clean, and safe!



SPECIFICATIONS

- Voltage: 24V
- Watts per foot: 5.8W/ft
- Average Lumens per foot: 270 Lm/ft
- 10 LEDs per foot
- Dimmable using dimmable driver
- Backed with 3M Adhesive
- Ambient Temperature: -4°F ~ +113°F
- Protection: IP20
- Tail end field cuttable every 1.18 Inches
- 50,000 Hours Lamp Life
- Max Run: 13.20 Feet
- CRI ≥ 95 , R_r ≥ 95 , R_g ≥ 100
- UL Listed for US and Canada 
- 5 Year Warranty

DIMENSIONS

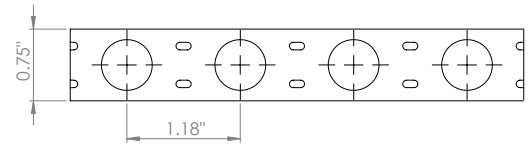






Please see PreciseLED.com for warranty and installation information.

ORDERING CODE

Example: **LVCB-16'-24V-95C-30K-90**

Product	Spool Length	Volts	CRI	Color Temperature	Beam Spread
LVCB	ft in	24V- 24 Volts	95C ≥ 95CRI	27K 2700K 30K 3000K 35K 3500K 40K 4000K	10 x 45 degrees 30 degrees 60 degrees 90 degrees
	Custom Length				

COMPATIBLE TAPE LIGHT DRIVERS

<p>Lutron Dimming Drivers</p>  <p>LA & LP Series</p>	<p>Wet Location 0-10V Dimmable Drivers</p>  <p>ZO Series</p>	<p>Magnetic Dimming Drivers</p>  <p>MG Series</p>	<p>Wet Location Non-Dimming Drivers</p>  <p>NN Series</p>	<p>Plug-In Drivers</p>  <p>PI Series</p>
---	---	--	--	--

Click [here](#) for a more detailed driver overview.

Louvre Cool Beam

LED TAPE LIGHT

Project Name:
Fixture Type:

Optional Wiring Configurations	Description	Ordering Code
	Custom Tail Wire Length	TAIW
	Custom Lead Wire Length	LEAW
	Tail Jumper Cable	JUMP
	2.1MM DC CONNECTOR (FEMALE)	PLGF
	2.1MM DC CONNECTOR (MALE)	PLGM


*Default wire length is 12", no number in front of ordering code indicates default length

Note: Solder points are secured with cable grips.


ORDERING CODE

Example: LVCB-16'-24V-95C-30K-14TAIW

COMPATIBLE TAPE LIGHT CHANNELS

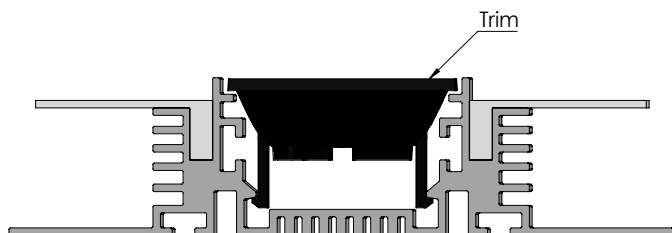

ZNLT-LOUV Zenlite Louvre
(Recess Mounted)



ZNLT-LOUV-SM/PM Zenlite Louvre Surface Mounted /
Pendant Mounted