

Sidewind

LED TAPE LIGHT

■ DESCRIPTION

Sidewind provides a smooth illuminated surface that can be bent in the XY Plane. It allows for many applications with round surfaces such as in round or circular coves. It has a flexible and durable protection layer that is water proof, flame, saltwater, and UV resistant. The accessories for this product allow for quick and easy installation without the need for a channel.

■ SPECIFICATIONS

- Voltage: 24V
- Watts per foot: 4.4W/ft
- Lumens per foot: 141.7 lm/ft (3000K)*
- Dimmable using dimmable driver
- Ambient Temperature: -4°F ~ +113°F
- Humidity: <70% R
- Protection: IP67, Outdoor rated
- Fire-retardant, UV Resistant, Saltwater Resistant
- 140° beam angle
- Minimum Bending Diameter: 4.72in
- 50,000 Hours Lamp Life
- Max Run: 16.40 ft
- 90+ CRI
- UL Listed for US and Canada
- 5 Year Warranty
- Specifiable to 3.94"
- Not Field Cutable



Color Temp.	27K	30K	35K
Multiplier	0.95	1	1.1

*estimated value

■ ORDERING CODE

Example: SDWD-16'-24V-90C-40K

Product	Spool Length	Volts	CRI	Color Temperature	Feed Options(Beginning)	Jumper Options
SDWD	'ft "in Custom Length Specifiable length: every 3.94in Not field cutable	24V- 24 Volts	90C ≥ 90CRI	24K 2400K 27K 2700K 30K 3000K 35K 3500K 40K 4000K	BGCT Beginning Connector BSCT Beginning Side Connector BBCT Beginning Bottom Connector *See WIRING OPTIONS for details	JPCN Jumper Connector JBCN Jumper Bottom Connector SPCN Splice Connector *See WIRING OPTIONS for details

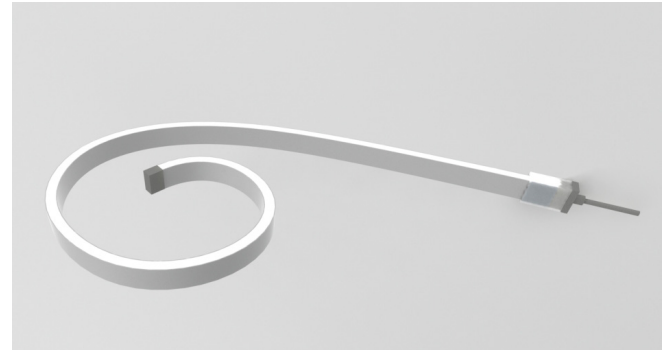
■ COMPATIBLE TAPE LIGHT DRIVERS

Lutron Dimming Drivers 	Wet Location 0-10V Dimmable Drivers 	Magnetic Dimming Drivers 	Wet Location Non-Dimming Drivers 	Plug-In Drivers
-----------------------------------	--	-------------------------------------	---	----------------------------


Click [here](#) for a more detailed driver overview.

Project Name:

Fixture Type:



■ DIMENSIONS

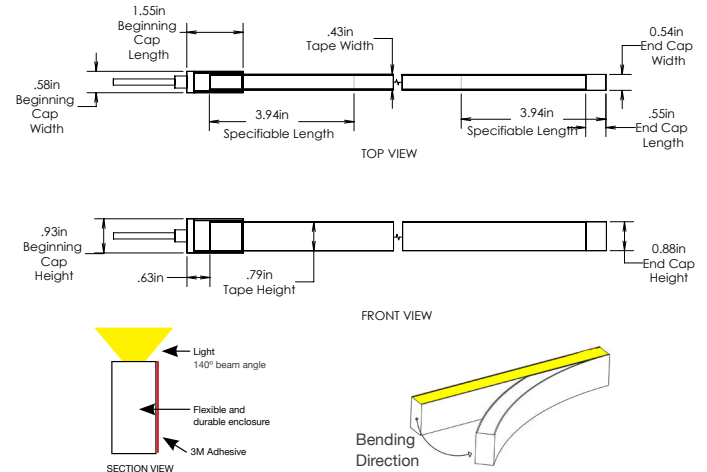







Sidewind

LED TAPE LIGHT

Project Name:

Fixture Type:


WIRING OPTIONS

First Run	Wire Length	BGCT Beginning Connector 	BSCT Beginning Side Connector 	BBCT Beginning Bottom Connector 
Connection (within max run of tape light)	Wire Length (Only for Jumper cable)	JPCN Jumper Connector 	JBCN Jumper Bottom Connector 	SPCT Splice Connector 

MOUNTING OPTIONS



SDWD-CLIP/SCRW



SDWD-CHNL