

# Sidewind

## LED TAPE LIGHT

### DESCRIPTION

Sidewind provides a smooth illuminated surface that can be bent in the XY Plane. It allows for many applications with round surfaces such as in round or circular coves. It has a flexible and durable protection layer that is water proof, flame, saltwater, and UV resistant. The accessories for this product allow for quick and easy installation without the need for a channel.

### SPECIFICATIONS

- Voltage: 24V
- Watts per foot: 4.4W/ft
- Lumens per foot: 141.7 lm/ft (3000K)\*
- Dimmable using dimmable driver
- Ambient Temperature: -4°F ~ +113°F
- Humidity: <70% R
- Protection: IP67
- Fire-retardant, UV Resistant, Saltwater Resistant
- 140° beam angle
- Minimum Bending Diameter: 4.72in
- 50,000 Hours Lamp Life
- Max Run: 16.40 ft
- 90+ CRI
- UL Listed for US and Canada
- 5 Year Warranty
- Specifiable to 3.94"
- Not Field Cutable



Color Temp.	27K	30K	35K
Multiplier	0.95	1	1.1

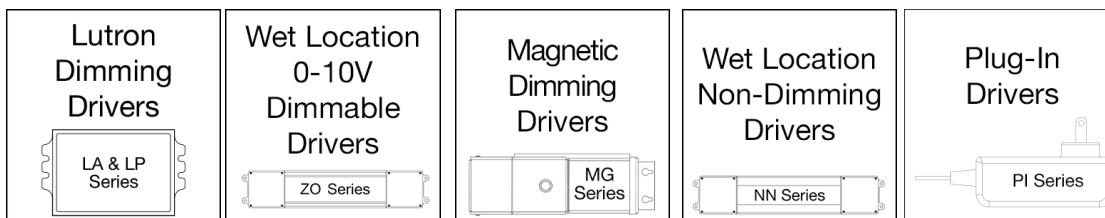
\*estimated value

### ORDERING CODE

Example: SDWD-16'-24V-90C-40K

Product	Spool Length	Volts	CRI	Color Temperature	Feed Options(Beginning)	Jumper Options
<b>SDWD</b>	'ft      "in  Custom Length  Specifiable length: every 3.94in Not field cutable	<b>24V-</b> 24 Volts	<b>90C</b> ≥ 90CRI	<b>24K</b> 2400K <b>27K</b> 2700K <b>30K</b> 3000K <b>35K</b> 3500K <b>40K</b> 4000K	<b>BGCT</b> Beginning Connector <b>BSCT</b> Beginning Side Connector <b>BBCT</b> Beginning Bottom Connector  *See WIRING OPTIONS for details	<b>JPCN</b> Jumper Connector <b>JBCN</b> Jumper Bottom Connector <b>SPCN</b> Splice Connector  *See WIRING OPTIONS for details


### COMPATIBLE TAPE LIGHT DRIVERS




Click [here](#) for a more detailed driver overview.

Project Name:

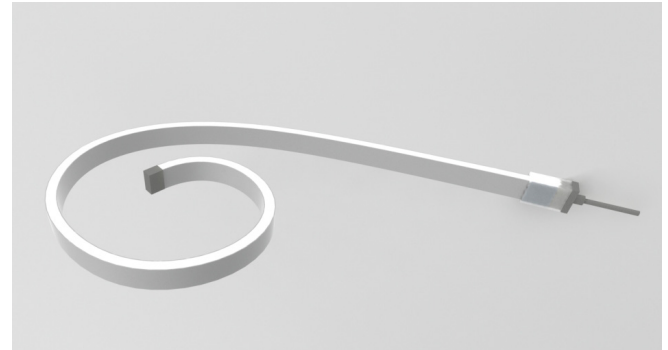Fixture Type:



### DIMENSIONS

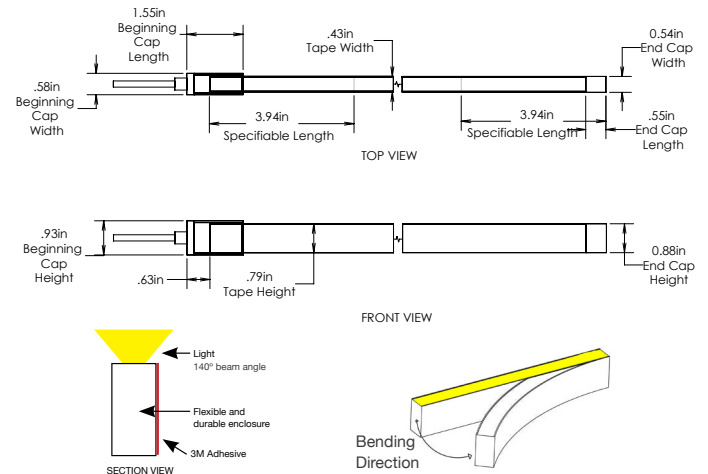







# Sidewind

LED TAPE LIGHT

Project Name:

Fixture Type:


WIRING OPTIONS

First Run	Wire Length	<b>BGCT</b> Beginning Connector 	<b>BSCT</b> Beginning Side Connector 	<b>BBCT</b> Beginning Bottom Connector 
Connection (within max run of tape light )	Wire Length (Only for Jumper cable)	<b>JPCN</b> Jumper Connector 	<b>JBCN</b> Jumper Bottom Connector 	<b>SPCT</b> Splice Connector 

MOUNTING OPTIONS



SDWD-CLIP/SCRW



SDWD-CHNL