

Topwind

LED TAPE LIGHT


Project Name:

Fixture Type:

DESCRIPTION


Topwind provides a uniform and smooth illuminated surface with a beam angle of 160 degrees. It has a flexible and durable protection layer that is water proof, flame resistant, saltwater resistant, and UV resistant. The accessories for this product allow for quick and easy installation without the need for a channel.

SPECIFICATIONS

- Voltage: 24V
- Watts per foot: 4.4W/ft
- Dimmable using dimmable driver
- Ambient Temperature: -4°F ~ +113°F
- Humidity: <70% R
- Protection: IP67
- Fire-retardant, UV Resistant, Saltwater Resistant
- 160° beam angle
- Minimum Bending Diameter: 3.15in
- 50,000 Hours Lamp Life
- 90+ CRI
- UL Listed for US and Canada 
- 3 Year Warranty



DIMENSIONS




Please see PreciseLED.com for warranty and installation information.

ORDERING CODE

Example: TPWD-16'-24V-90C-40K

Product	Spool Length	Volts	CRI	Color Temperature
TPWD	'ft "in	24V- 24 Volts	90C ≥ 90CRI	27K 2700K 30K 3000K 35K 3500K 40K 4000K
	Custom Length			
	Cutable length: 3.94in			

COMPATIBLE TAPE LIGHT DRIVERS

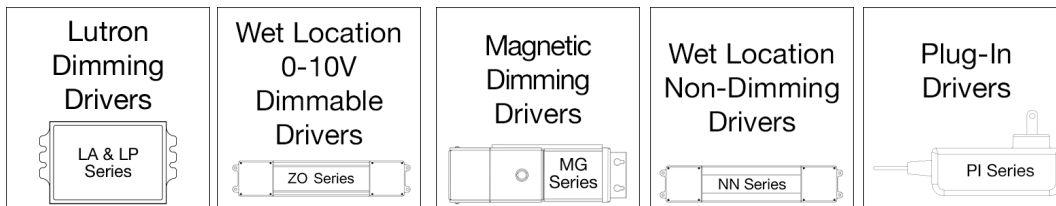


Click [here](#) for a more detailed driver overview.

Project Name:

Fixture Type:

■ **Accessories**

These are the additional accessories that can be ordered with the tapelight:

Product	Image	Ordering Code	Quantity
Beginning Connector		TPWD-BGCT	
End Cap		TPWD-EDCP	
Jumper Connector		TPWD-JPCN	
Splice Connector		TPWD-SPCT	
Mounting Clips		TPWD-CLIP	