

Topwind

LED TAPE LIGHT

Project Name:

Fixture Type:

DESCRIPTION

Topwind provides a uniform and smooth illuminated surface with a beam angle of 160 degrees. It has a flexible and durable protection layer that is water proof, flame resistant, saltwater resistant, and UV resistant. The accessories for this product allow for quick and easy installation without the need for a channel.



SPECIFICATIONS

- Voltage: 24V
- Watts per foot: 4.4W/ft
- Lumens per foot: 262 Lm/ft (3000K)
- Dimmable using dimmable driver
- Ambient Temperature: -4°F ~ +113°F
- Humidity: 40%-70% R
- Protection: IP67
- Fire-retardant, UV Resistant, Saltwater Resistant
- 160° beam angle
- Minimum Bending Diameter: 4.72in
- Max Run: 16.40 ft
- 50,000 Hours Lamp Life
- 90+ CRI
- ETL Safety Certification
- UL Listed for US and Canada
- 5 Year Warranty
- Specifiable to 3.94"
- Not Field Cuttable



Color Temp.	27K	30K	35K
Multiplier	0.95	1	1.1

DIMENSIONS

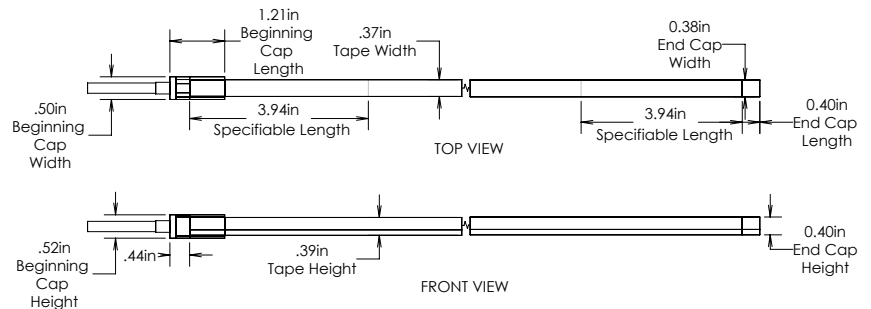


ORDERING CODE

Example: TPWD-16'-24V-90C-40K

Product	Spool Length	Volts	CRI	Color Temperature	Feed Options(Beginning)	Jumper Options
TPWD	'ft "in Custom Length Specifiable length: every 3.94in Not field cuttable	24V- 24 Volts	90C ≥ 90CRI	24K 2400K 27K 2700K 30K 3000K 35K 3500K 40K 4000K	BGCT Beginning Connector *See WIRING OPTIONS for details	JPCN Jumper Connector SPCN Splice Connector *See WIRING OPTIONS for details

COMPATIBLE TAPE LIGHT DRIVERS



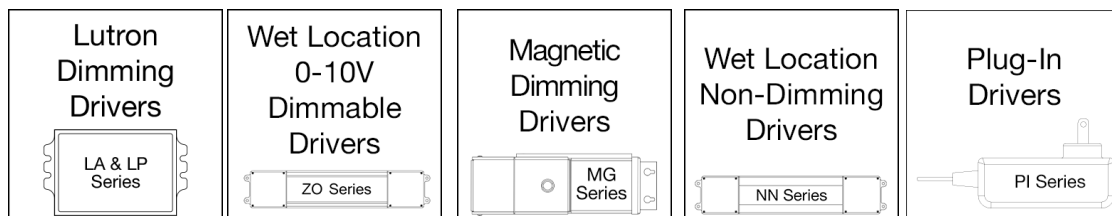


Click [here](#) for a more detailed driver overview.


Project Name:

Fixture Type:

■ WIRING OPTIONS

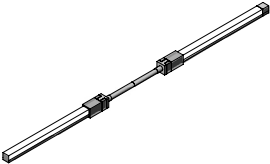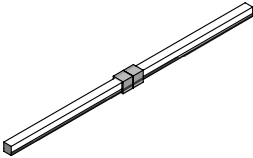First Run	Wire Length	BGCT Beginning Connector 	
Connection (within max run of tape light)	Wire Length	JPCN Jumper Connector 	SPCT Splice Connector 

■ MOUNTING OPTIONS



TPWD-CLIP/SCRW