

Topwind

LED TAPE LIGHT

Project Name:


Fixture Type:

DESCRIPTION

Topwind provides a uniform and smooth illuminated surface with a beam angle of 270°. It has a flexible and durable protection layer that is water proof, flame resistant, saltwater resistant, and UV resistant. The accessories for this product allow for quick and easy installation without the need for a channel.




SPECIFICATIONS

- Voltage: 24V
- Watts per foot: 4.4W/ft
- Lumens per foot: 417 Lm/ft (3000K)
- Dimmable using dimmable driver
- Ambient Temperature: -4°F ~ +113°F
- Humidity: 40%-70% R
- Protection: IP65, Rated for Outdoor use under canopy
- Fire-retardant, UV Resistant, Saltwater Resistant
- 270° beam angle
- Minimum Bending Diameter: 3.94 in
- Max Run: 16.40 ft
- 50,000 Hours Lamp Life
- 90+ CRI
- ETL Safety Certification
- UL Listed for US and Canada 
- 5 Year Warranty
- Specifiable to 3.94"
- Not Field Cuttable

| | | | |
|-------------|------|-----|-----|
| Color Temp. | 27K | 30K | 35K |
| Multiplier | 0.95 | 1 | 1.1 |

DIMENSIONS

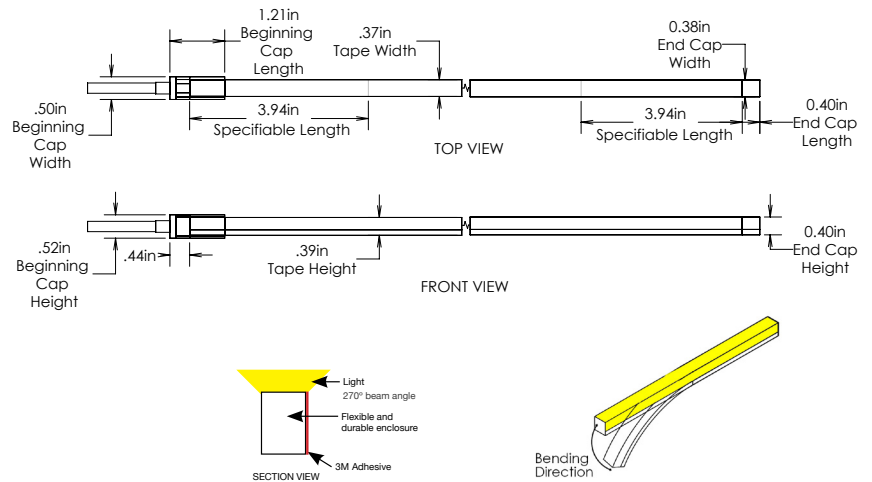






ORDERING CODE

Example: TPWD-16'-24V-90C-40K

| Product | Spool Length | Volts | CRI | Color Temperature | Feed Options(Beginning) | Jumper Options |
|---------|--|---------------|-------------|--|---|---|
| TPWD | ft "in Custom Length Specifiable length: every 3.94in Not field cuttable | 24V- 24 Volts | 90C ≥ 90CRI | 27K 2700K 30K 3000K 35K 3500K 40K 4000K | BGCT Beginning Connector *See WIRING OPTIONS for details | JPCN Jumper Connector SPCN Splice Connector *See WIRING OPTIONS for details |

COMPATIBLE TAPE LIGHT DRIVERS

| | | | | |
|---|---|--|--|---|
| <p>Lutron Dimming Drivers</p>  <p>LA & LP Series</p> | <p>Wet Location 0-10V Dimmable Drivers</p>  <p>ZO Series</p> | <p>Magnetic Dimming Drivers</p>  <p>MG Series</p> | <p>Wet Location Non-Dimming Drivers</p>  <p>NN Series</p> | <p>Plug-In Drivers</p>  <p>PI Series</p> |
|---|---|--|--|---|

Click [here](#) for a more detailed driver overview.




Topwind

LED TAPE LIGHT


Project Name:

Fixture Type:



■ **WIRING OPTIONS**
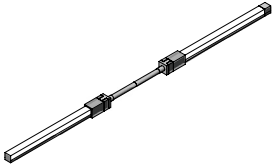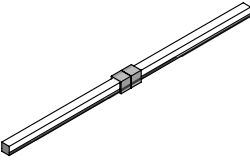
| | | | |
|---|-------------|---|---|
| First Run | Wire Length | BGCT Beginning Connector  | |
| Connection (within max run of tape light) | Wire Length | JPCN Jumper Connector  | SPCT Splice Connector  |


■ **MOUNTING OPTIONS**



TPWD-CLIP/SCRW



TPWD-CHNL



Topwind


LED TAPE LIGHT

Project Name:



Fixture Type:

■ INSTALLATION INSTRUCTIONS


LIGHT PROFILE




BENDING DIRECTION



CORRECT BENDING






The strip is folded so that the light surface is facing outwards.

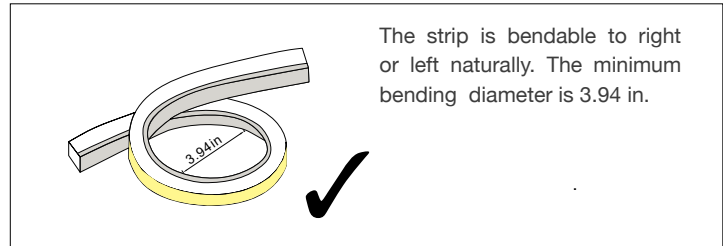

The strip is bendable to right or left naturally. The minimum bending diameter is 3.94 in.

INCORRECT BENDING



DO NOT bend upwards or downwards. (As shown in images 1 and 2.) This can damage the tapelight.

DO NOT twist. This can damage the tapelight.

■ INSTALLATION CAUTIONS

- **DO NOT** apply any chemical glue to the back of the tapelight during installation. Such chemicals will change the color of the Topwind.
- Please use Mounting clips or Aluminum channel for installation.
- This fixture is not field cuttable.

Cautions for Outdoor Use

- Use Aluminum channel instead of mounting clips if one or more of the following are true:
 - The wall's surface is wooden
 - The wall's surface is not smooth
 - The wall's surface is near a combustible or near a step edge.