

Instruction Sheet

■ For your safety, read and understand instructions completely before starting installation

Note: PreciseLED fixtures are designed to meet the latest NEC requirements and are listed in full compliance with UL 1598. Before attempting installation of any lighting fixture, check your local electrical building code. This code sets the wiring standards and installation requirements for your locality and should be understood before starting work. If fixture is to be switch from wall switch or dimmer, make sure black supply wire properly connected to switch or dimmer (follow switch/dimmer instructions).

■ **WARNING:**

1. Before wiring to power supply, turn off electricity at the fuse or circuit break box.
2. Always have installation performed by a licensed electrician.

■ **FIXTURE INSTALLATION**


1. The process of installing Zenlite Tile fixture is similar to installing the tile. Before installing tiles, run low voltage wire from power supply(remote) to the fixture location. Connect fixture lead wire to the low voltage wire on subfloor and apply thinset.

2a. Place shallow Zenlite Tile on sub-floor and level it with the rest of tiles.


2b. For deep version of Zenlite Tile:

- I. Create space in the sub-floor as needed,
- II. Install first run and insert jumper wire or quick connector inside of the cavity of the deep tile extrusion. (*Never put jumper wire under tiles.)
- III. Place the additional run next to the first run.
- IV. Apply bead of silicone at the seam between two fixtures.

Shallow version:

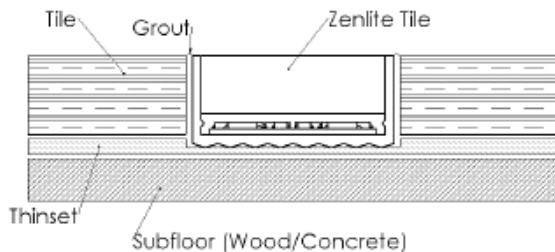

Deep Version:

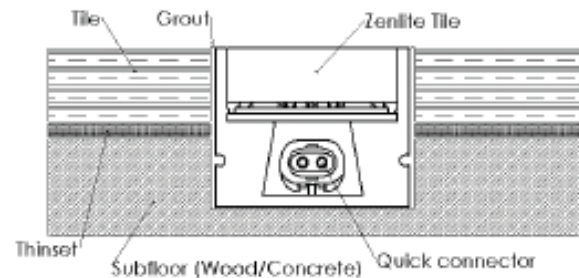

2c. For installation in concrete:

Place template* provided at desired location prior to concrete pouring, remove template after concrete is poured and cured. Place fixture in the space created by the template. Use concrete silicone to seal any gap between fixture and concrete slab.

*Template available upon request for concrete pouring.

3. Test fixture, then Install the rest of the tiles. Allow adhesive to dry/cure before moving to next step.

4. Apply grout and wipe off residue grout with a damp sponge.

Enjoy your PreciseLED fixture!

■ **FIXTURE MAINTENANCE AND SERVICING**

To clean:

Sweep or vacuum the floor around fixture, once dirt is removed, use mop or sponge with water to clean the fixture.

To replace fixture:

- I. Remove grout with grout saw or other grout removing tool such as an oscillating tool,
- II. Remove the old fixture,
- III. Repeat installation steps above to install new fixture,
- IV. Apply grout and wipe off residue grout with a damp sponge.