

Sidewind Max V2

LED TAPE LIGHT

DESCRIPTION

Sidewind provides a smooth illuminated surface that can be bent in the XY Plane. It allows for many applications with round surfaces such as in round or circular coves. It has a flexible and durable protection layer that is water proof, flame, saltwater, and UV resistant. The accessories for this product allow for quick and easy installation without the need for a channel.

SPECIFICATIONS

- Voltage: 24V
- Watts per foot: 5.3 W/ft
- Lumens per foot: 375 lm/ft (3000K)*
- Dimmable using dimmable driver
- Ambient Temperature: -4°F ~ +113°F
- Humidity: <70% R
- Protection: IP67, Outdoor rated
- Fire-retardant, UV Resistant, Saltwater Resistant
- 140° beam angle
- Minimum Bending Radius: 2.36in
- 50,000 Hours Lamp Life
- Max Run: 32.8 ft
- 90+ CRI
- UL Listed for US and Canada
- 5 Year Warranty
- Specifiable to 1.97"
- Not Field Cuttable



Color Temp.	24K	27K	30K	35K	40K	50K	65K
Multiplier	0.75	0.8	0.84	0.92	1	1.17	1.42

*estimated value

ORDERING CODE

Example: SDWM-V2-16'-24V-90C-40K

Product	Spool Length	Volts	CRI	Color Temperature	Feed Options(Beginning)	Jumper Options
SDWM-V2	ft in Custom Length Specifiable length: every 4.72in Not field cuttable	24V - 24 Volts	90C ≥ 90CRI	☐ 24K 2400K ☐ 27K 2700K ☐ 30K 3000K ☐ 35K 3500K ☐ 40K 4000K ☐ 50K 5000K ☐ 65K 6500K	☐ BGCT Beginning Connector ☐ BSCT Beginning Side Connector ☐ BBCT Beginning Bottom Connector *See WIRING OPTIONS for details	☐ JPCN Jumper Connector ☐ JBCN Jumper Bottom Connector ☐ SPCN Splice Connector *See WIRING OPTIONS for details

COMPATIBLE TAPE LIGHT DRIVERS

Lutron
Dimming
Drivers

LA & LP
Series

Wet Location
0-10V
Dimmable
Drivers

ZO Series

Magnetic
Dimming
Drivers

MG Series

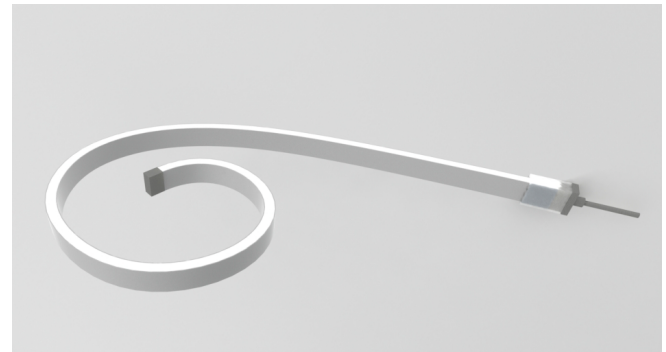
Wet Location
Non-Dimming
Drivers

NN Series


Plug-In
Drivers

PI Series

Click [here](#) for a more detailed driver overview.



DIMENSIONS

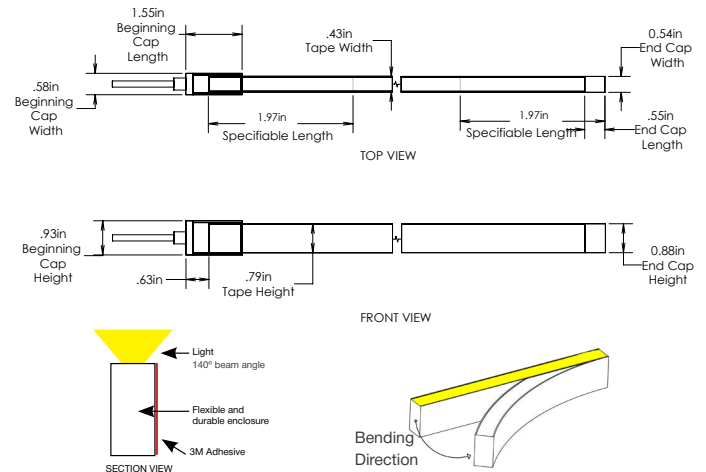







Sidewind Max V2

LED TAPE LIGHT

Project Name:

Fixture Type:


■ WIRING OPTIONS

First Run	Wire Length 	☐ BGCT Beginning Connector 	☐ BSCT Beginning Side Connector 	☐ BBCT Beginning Bottom Connector 
Connection (within max run of tape light)	Wire Length (Only for Jumper cable) 	☐ JPCN Jumper Connector 	☐ JBCN Jumper Bottom Connector 	☐ SPCT Splice Connector 

■ MOUNTING OPTIONS



SDWD-CLIP/SCRW



SDWD-CHNL