

Pendant Mount Installation Instructions

■ For your safety, read and understand instructions completely before starting

Note: PreciseLED recessed fixtures are designed to meet the latest NEC requirements and are listed in full compliance with UL 1598. Before attempting installation of any recessed lighting fixture, check your local electrical building code. This code sets the wiring standards and installation requirements for your locality and should be understood before starting work. If fixture is to be switch from wall switch or dimmer, make sure black supply wire properly connected to switch or dimmer (follow switch/dimmer instructions).

■ WARNING:



1. Before wiring to power supply, turn off electricity at the fuse or circuit break box.
2. Insulation may be placed in direct contact with ANY part of the fixture.
3. Always have installation performed by a licensed electrician.

■ FIXTURE INSTALLATION


PART LIST

A Optics	G Wire nuts (By others)
B LED module	H BX connector nut
C LED module screws	I drywall anchor/ 1/4-20 screws (by others)
D Screw tab	
E BX cable (by others)	
F BX knockout plate	


Mounting Holes Dimensions

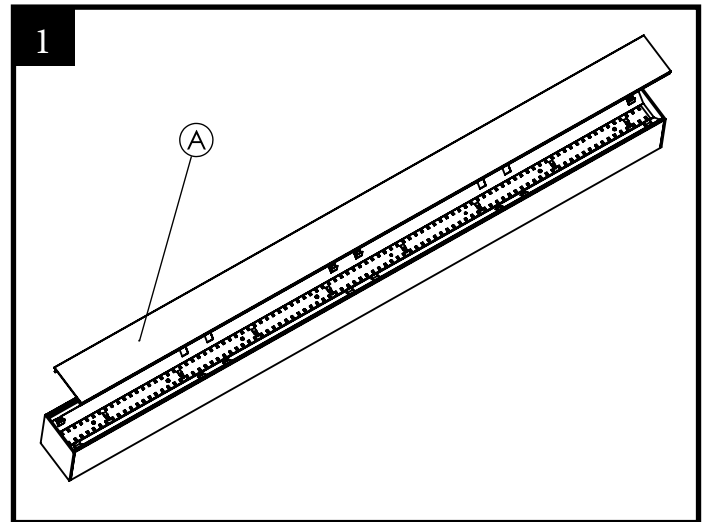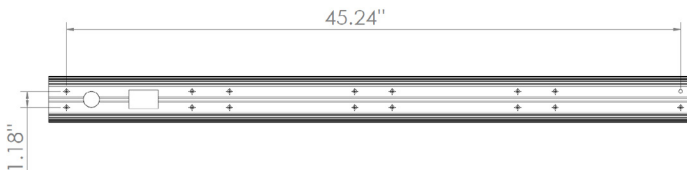

1. Ensure the power to the fixture's circuit is turned off. Remove optics (A) by the provided tool.

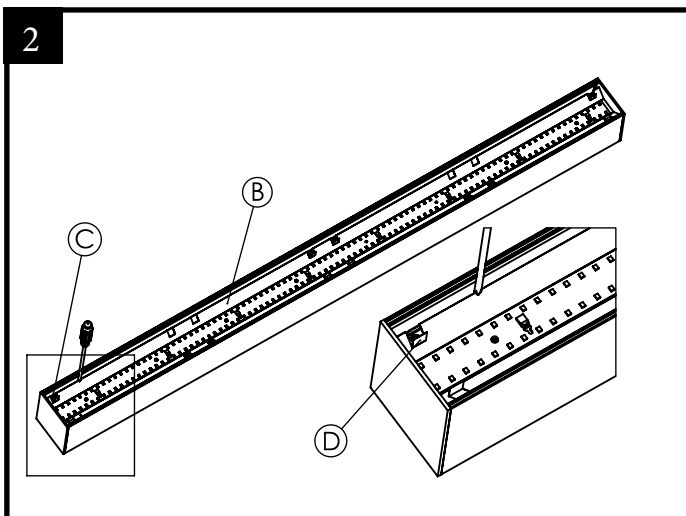


2. Open the screw tabs (D) (DO NOT remove the tabs) on the LED module, and uncrew the screws (C)

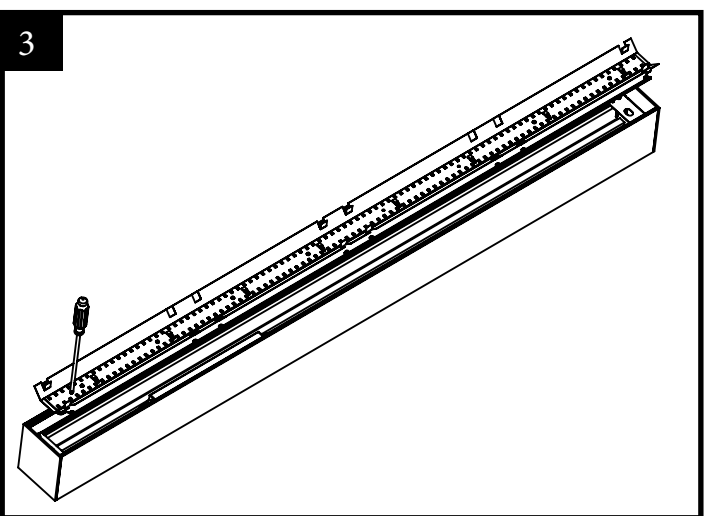


3. Disconnect the LED module wires and remove the LED module (B) to get access to the wires.


Pendant Mount Installation Instructions

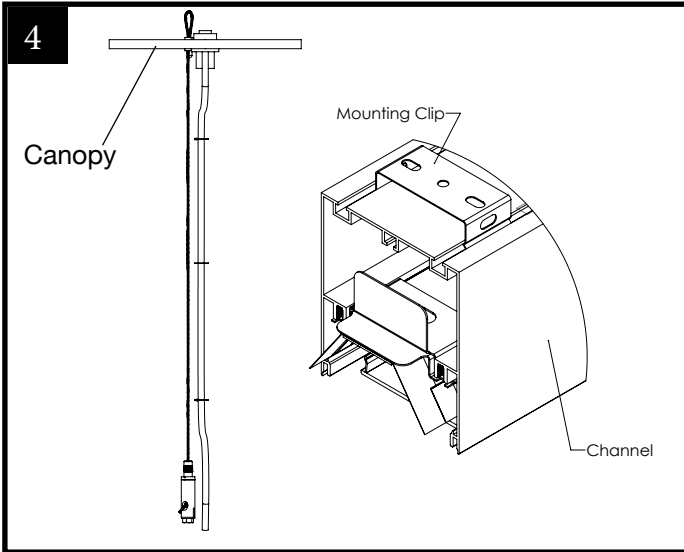


4. Locate canopy in the ceiling. Slide and attach mounting clip to channel at specified pendant locations.

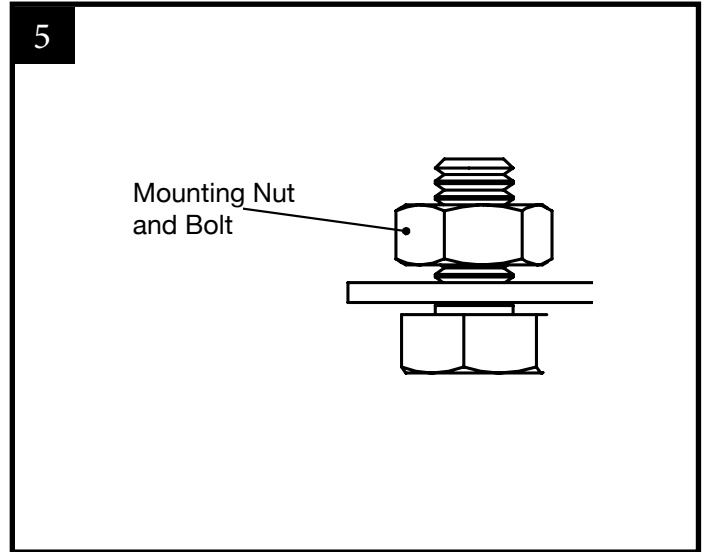


5. Attach the the mounting nut and bolts to the mounting clips at the specified pendant locations.

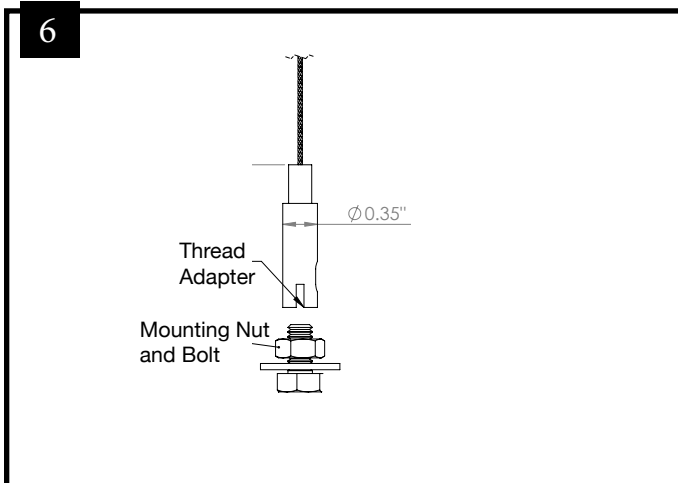


6. Fasten fixture to ceiling by attaching the thread adapter to the mounting nut and bolt.

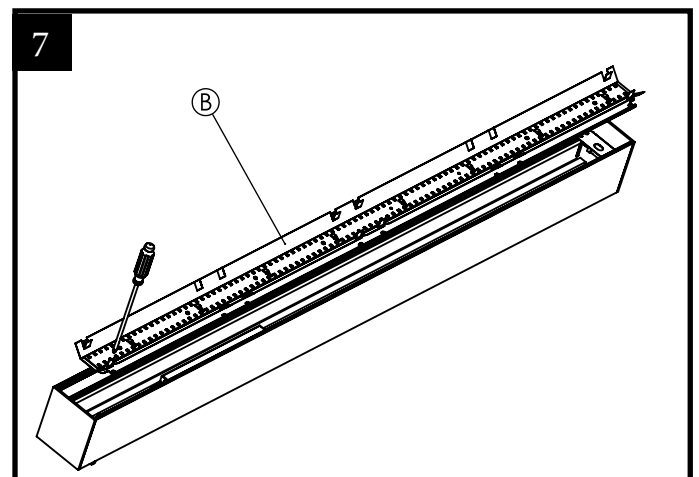

7. Re-install the LED module (B) and LED module screws

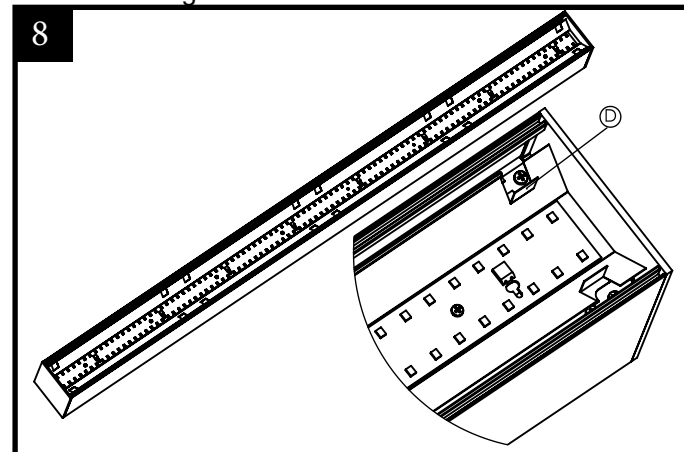

8. Push back the screw tabs to original position (DO NOT remove the tabs)

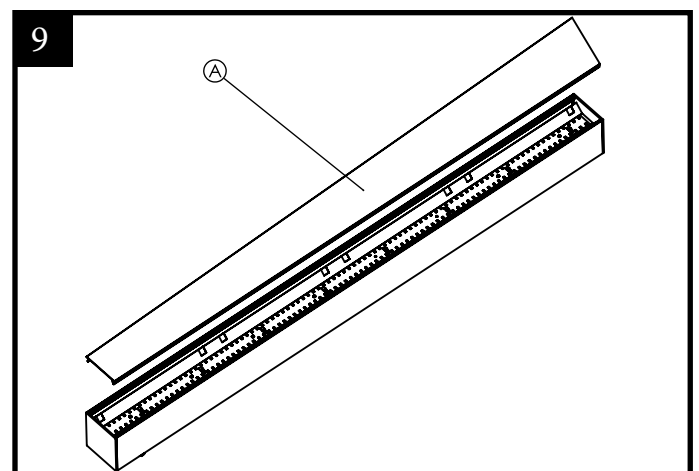


9. Re-install optics (A). Turn on the power safely.

Pendant Mount Installation Instructions

■ SYSTEM RUN

Quick-wire connection system allows STUD3 to be joined together with only one line power input to the continuous system runs. The STUD3 unit with line power input is connected to next unit with quick-wire connectors.

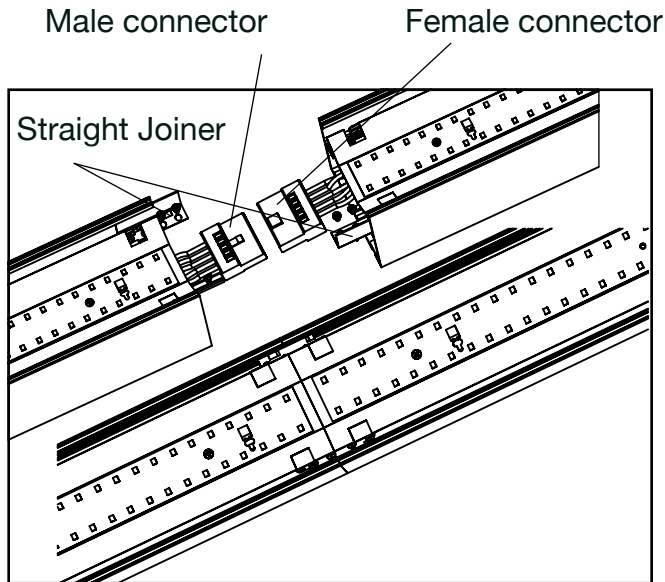

Remove the male connector, and connect the female connector to the male connector of next fixture. Join two fixtures together by the provided straight joiner and screws.